



شرکت فرآورده های نسوز صنعت پاسارگاد
Pasargad Industry Refractories Company (PIREFCO.)


PIREF-Ceramic Fiber Board 1260 °C

Dimensions

Length: 900+5mm; 1200+5mm;

Width: 600±2mm; 1000±2mm;

Thickness: 25±2mm; 50±2mm;

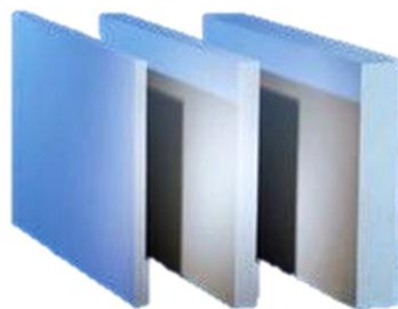

Mechanical Analysis

Density (Kg/m ³)	Hot Face Thermal Conductivity (W/m.k , 300 Kg/m ³)				Compress Strength (MPa)	Shrinkage After Heating (%)	Continuous Using Temperature (°C)
300 (~ 280 to 340)	200 °C	400 °C	500 °C	600 °C	0.10	≤ 2.5 (1100 °C × 24 hrs)	1200
	0.055	0.073	0.086	0.105			